

# Numerical Interval Simulation: Combined Qualitative and Quantitative Simulation to Bound Behaviors of Non-Monotonic Systems\*

Marcos Vescovi, Adam Farquhar, and Yumi Iwasaki

Knowledge Systems Laboratory Stanford University  
701 Welch Road, Bldg. #C CA 94304 Palo Alto USA  
phone +1 415 851 9427 fax +1 415 725 5850  
vescovi, axf, iwasaki@ksl.stanford.edu

**Abstract:** Models of complex physical systems often cannot be defined precisely, either because of lack of knowledge or because the system parameters change over time according to unknown phenomena. Such systems can be represented by semi-quantitative models that combine both qualitative and quantitative knowledge. This paper presents *Numerical Interval Simulation*, a method that can simulate systems involving any continuous, nonmonotonic functions. We present a successful application of NIS to predict the behavior of a complex process at a Brazilian-Japanese steel company. We claim that such capability of simulating nonmonotonic functions is fundamental in order to handle real-world complex industrial processes.

## 1 Introduction

Mathematical models of complex physical systems cannot be precisely defined in many cases, either due to lack of knowledge or because parameters and functions change over time according to unknown phenomena. Nevertheless, it is often possible to provide reasonable bounds for the parameters and functions. Bounds on parameters are interval ranges. Bounds on incompletely known functions take the form of a pair of functions, one to provide an upper bound and another to provide a lower bound. Such models that can integrate qualitative and quantitative knowledge are called semi-quantitative models.

They can represent important classes of complex systems such as chemical, electro-mechanical, nuclear, thermal, steel and other industrial processes [1].

Many qualitative simulation methods are based on constraint propagation. They generate all possible states and use filtering techniques to eliminate impossible ones. Semi-quantitative methods such as Q2 [2] and Fu-Sim [3] add numerical information and take advantage of it in the filtering process. The basic algorithm remains the same. Such semi-quantitative methods do not fully exploit the quantitative knowledge and produce only weak predictions across time intervals. This is primarily due to the limitations of interval propagation across derivative constraints. The mean value theorem is used to constrain the ranges of a variable at two adjacent time points  $t_n$  and  $t_{n+1}$ , where  $t_n$  and  $t_{n+1}$  are the temporal boundaries of a qualitative state. Those methods do not reason about the behavior of the system within a qualitative state.

This paper presents *Numerical Interval Simulation* (NIS), a method that produces more precise simulations of semi-quantitative models. NIS performs numerical simulations using maximal and minimal values for the derivatives of the state variables. In order to calculate such maximal and minimal values, NIS uses interval arithmetic to calculate intervals containing the possible values of the derivatives and takes their maximum or minimum respectively. NIS is complete in the sense that its solutions bound all the solutions of the semi-quantitative model. The method replaces the use of the mean value theorem with explicit integration.

NIS was originally presented at the 1992 Qualitative Reasoning workshop [4]. At that

\* This research is in part supported by the Advanced Research Projects Agency, ARPA Order 8607, monitored by NASA Ames Research Center under grant NAG 2-581, and by NASA Ames Research Center under grant NCC 2-537.

same workshop, Kay and Kuipers also presented their work on dynamic envelopes [5]. Both techniques share the same fundamental insights. Subsequent development has lead in different directions, although it should be possible to unify the two lines of work. NIS has been extended to handle non-monotonic functions and forcing functions, whereas the dynamic envelope method is more closely integrated with the QSIM [6] formalism. The dynamic envelope method of Kay and Kuipers [7] derives and numerically simulates "extremal systems" composed of "extremal equations" that are bounds on the derivatives of the state variables. Such "extremal systems" have been automatically generated only for systems of monotonic functions.

NIS is an extension of the fuzzy simulation methods for linear systems proposed in [8] and for piece-wise linear systems proposed in [9]. We claim that the extension presented in this paper to handle nonmonotonic functions and forcing functions is fundamental to simulate real-world nonlinear complex systems. We demonstrate the usefulness of NIS by presenting its successful application to simulate a complex sintering process at Companhia Siderurgica de Tubarao, a Brazilian-Japanese steel company located in Brazil.

This paper is organized as follows: We first describe the *Numerical Interval Simulation* method. Second, we show two examples of numerical interval simulation of systems of ordinary differential equations composed of nonlinear nonmonotonic functions. The first system represents an electrical system with power supplied by an AC generator, and the second represents an inverted pendulum attached to an electric motor. We then discuss the mathematical properties of the method. We finally present the application of NIS to a complex industrial process. We close with a discussion of related work and conclusions.

## 2 Numerical Interval Simulation

The *Numerical Interval Simulation* method takes as input a semi-quantitative model and generates upper and lower bounds on the trajectories of each of the state variables in the model.

The semi-quantitative model is composed of a set of equations, interval bounds on the constant parameters used in the equations, and interval bounds on the initial values of the state variables.

The equations are (non-) linear first-order ordinary differential equations (ODEs) of the form:

$$x'_k = f_k(t, x_1, x_2, \dots, x_n) \text{ for } k = 1 \dots n$$

The functions  $f_k$  can contain the standard arithmetic operators such as addition, subtraction, multiplication, division, exponential, logarithm, sines, cosines, and constant parameters. In addition,  $f_k$  can also contain intervals in place of constant parameters and interval functions that bound the values of the actual parameters and functions. Interval functions are functions that take intervals as arguments and return an interval. In other words,  $f_k$  can contain, instead of a real-valued function  $g(t, x_1, \dots, x_n)$ , an interval function  $h(t, i_1, \dots, i_n)$  such that  $g(t, x_1, \dots, x_n) \in h(t, i_1, \dots, i_n)$  where  $i_j$ 's are intervals and  $x_j \in i_j$  for  $j = 1$  to  $n$ .

NIS performs numerical simulation, using extremal values for the derivatives of the state variables. Such extremal values for the derivatives are calculated in the following manner:

- First, NIS uses interval arithmetic to calculate the interval of possible values for the derivatives of the state variables [10]. Since the functions  $f_k$  can contain intervals (as parameters) and interval functions, the arithmetic operators in  $f_k$  are actually their corresponding interval arithmetic operators, and  $f_k$  are interval functions as well. NIS uses  $f_k$  to calculate the intervals for the values of the derivatives.
- Second, NIS takes the maximum or minimum of the resulting interval, depending on whether the maximal or minimal derivative is required.

Later in the paper, we show that NIS is complete in the sense that its result is guaranteed to bound all the possible solutions of the semi-quantitative model. The only restriction for the functions  $f_k$  used in the proof of completeness is that such functions must be continuous over the intervals considered in the simulation. It means that functions  $f_k$  can be composed not only of monotonic functions but also of nonmonotonic ones. NIS allows nonmonotonic functions over the reals such as multiplication, sine, cosine,

exponential and logarithm, and the arbitrary interval functions can also bound a set of nonmonotonic arbitrary real functions.

The NIS method calculates maximal and minimal values for the derivatives at a given instant  $t_n$ . Such extremal values are used by a numerical simulator to determine the value of the state variables at the next instant  $t_{n+1}$ . Several different methods could be used to perform the numerical simulation. We present below NIS using both the Euler's method and the Runge-Kutta method.

## 2.1 Euler's Method NIS

Let  $x_k(t) = [x_{kmin}(t), x_{kmax}(t)]$  be the interval such that its lower and upper bounds correspond to the minimum value  $x_{kmin}(t)$  and the maximum value  $x_{kmax}(t)$  of state variable  $x_k$  at time  $t$  respectively. In the remainder of this paper, we will use the notation  $[b]$  for the point interval  $[b, b]$  for brevity. The Euler's method NIS for each simulation step can be described as:

1) Calculate the maximum  $\delta_{max}(t_n)_i$  and the minimum  $\delta_{min}(t_n)_i$  values for the derivatives of state variables  $x_i$  at instant  $t_m$  in the following manner:

$$\delta_{max}(t_m)_i = \max(f_i(t_m, x_1, x_2, \dots, [x_{imax}], \dots, x_n))$$

$$\delta_{min}(t_m)_i = \min(f_i(t_m, x_1, x_2, \dots, [x_{imin}], \dots, x_n)),$$

where  $x_j$  ( $j = 1 \dots n$  except  $i$ ) are the interval  $[x_{jmin}, x_{jmax}]$ .

Notice that, the functions  $f_i$  are calculated taking as arguments the real maximal value  $x_{imax}(t_m)$  and the real minimal value  $x_{imin}(t_m)$  of state variables  $x_i$  at instant  $t_m$  respectively, instead of using the interval  $[x_{imin}(t_m), x_{imax}(t_m)]$ . This is fundamental to provide accurate simulations and will be discussed in more detail later in the paper.

2) Calculate the maximum bound  $x_{imax}(t_{m+1})$  and minimum bound  $x_{imin}(t_{m+1})$  at instant  $t_{m+1}$  with the given step size of  $\delta t$ :

$$x_{imax}(t_{m+1}) = x_{imax}(t_m) + \delta t \delta_{max}(t_m)_i$$

$$x_{imin}(t_{m+1}) = x_{imin}(t_m) + \delta t \delta_{min}(t_m)_i$$

## 2.2 Runge-Kutta NIS

We presented the Euler's method in two steps by first calculating the extremal values for the derivatives and second by calculating the values of the state variables for aims of clarity. With the Runge-Kutta NIS, the extremal values for derivatives are calculated several times inside each iteration of the method. We present below the four-stage Runge-Kutta NIS method. We use the symbols  $\oplus$  and  $\otimes$  to represent the interval arithmetic relations addition and multiplication respectively. The equations are given for the upper bound,  $x_{imax}$ . The equations for the lower bound are identical with  $min$  substituted for  $max$  throughout.

$$x_{imax}(t_{m+1}) = x_{imax}(t_m) + \frac{1}{6}(k_{i1max} + 2k_{i2max} + 2k_{i3max} + k_{i4max})$$

where

$$k_{i1max} = \delta t \max(f_i(t_m, x_1, x_2, \dots, [x_{imax}], \dots, x_n)),$$

$$k_{i2max} = \delta t \max(f_i(t_m + \frac{1}{2}\delta t, x_1 \oplus [\frac{1}{2}] \otimes [k_{i1min}, k_{i1max}], \dots, [x_{imax} + \frac{1}{2}k_{i1max}], \dots, x_n \oplus [\frac{1}{2}] \otimes [k_{n1min}, k_{n1max}]))$$

$$k_{i3max} = \delta t \max(f_i(t_m + \frac{1}{2}\delta t, x_1 \oplus [\frac{1}{2}] \otimes [k_{i2min}, k_{i2max}], \dots, [x_{imax} + \frac{1}{2}k_{i2max}], \dots, x_n \oplus [\frac{1}{2}] \otimes [k_{n2min}, k_{n2max}]))$$

$$k_{i4max} = \delta t \max(f_i(t_m + \delta t, x_1 \oplus [k_{i3min}, k_{i3max}], \dots, [x_{imax} + k_{i3max}], \dots, x_n \oplus [k_{n3min}, k_{n3max}]))$$

## 2.3 Two Examples

In this section, we show NIS simulations of two electro-mechanical systems. Each physical system is represented by ODEs that include nonlinear nonmonotonic functions.

### 2.3.1 Coupled two-stage electrical system

The first system is the coupled two-stage electrical system shown in Figure 1. The first stage is an RL series circuit with input DC voltage  $V_{in}$  provided by a battery. The second stage is an RC parallel circuit with input current  $I_{in}$  provided by an AC generator. The current  $I_{in}$  is a sinusoidal signal with amplitude and frequency directly dependent on the first stage circuit output current  $I_l$ .

The following second-order system represents an instance of a such device:

$$I_l' = \frac{V_{in}}{l} - \frac{R_l}{l} I_l, \text{ where } V_{in} = [4.028, 4.03]$$

for  $t \leq 20$  and  $V_{in} = 0$  for  $t > 20$ .

$$V_c' = \frac{I_{in}}{c} - \frac{V_c}{R_c} c, \text{ where } I_{in} = k_A I_l \sin(k_f I_l t)$$

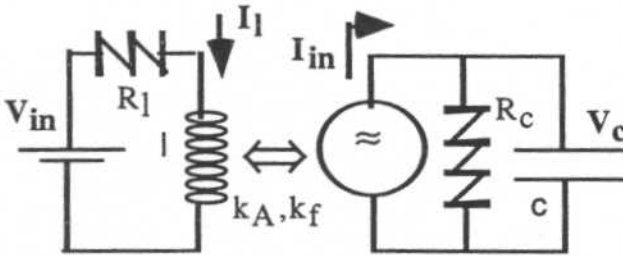


Figure 1: The coupled two-stage electrical system.

Figure 2 shows a NIS simulation of such system, given the following parameter and initial values:

$$R_l = [408, 410] \text{ m}\Omega,$$

$$l = 2 \text{ H},$$

$$R_c = [400, 500] \text{ k}\Omega,$$

$$c = 10 \text{ }\mu\text{F},$$

$$k_A = [16, 18] 10^{-8}, k_f = [123, 125] 10^{-3},$$

$$I_l(0) = 0 \text{ A, and}$$

$$V_c(0) = 0 \text{ V.}$$

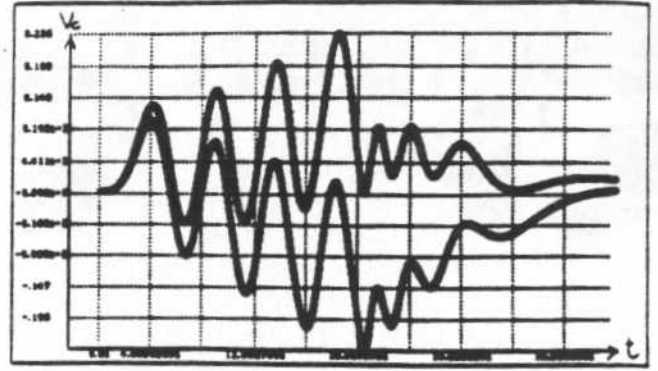


Figure 2: NIS simulation of variable  $V_c$  of the coupled electrical system.

### 2.3.2 Inverted pendulum

The second example is a well known problem in nonlinear mechanics, known as the inverted pendulum. The pendulum is a stiff bar of length  $L$  which is supported at one end by a frictionless pin. The support pin is given a rapid up-and-down motion  $s$  by means of an electric motor,  $s = A \sin \omega t$ . Application of Newton's second law of motion yields the equation  $L\theta'' = (g - \omega^2 A \sin \omega t) \sin \theta$ , where  $\theta$  is the angular position of the bar ( $\theta = 0$  when the bar is directly above the pin), and  $g$  is the acceleration due to gravity.

Following is the second-order system representing the inverted pendulum:

$$\theta' = \delta\theta$$

$$\delta\theta' = \frac{1}{L} (g - \omega^2 A \sin \omega t) \sin \theta$$

Figure 3 shows a NIS simulation of such system, given the following parameter and initial variables values:

$$g = 386.09 \text{ in/sec}^2,$$

$$L = 10 \text{ in},$$

$$A = [0.5, 0.55] \text{ in},$$

$$\omega = [5.3, 5.4] \text{ rad/sec},$$

$$\theta(0) = \frac{\pi}{3} \text{ rad, and}$$

$$\delta\theta(0) = 0 \text{ rad/sec.}$$



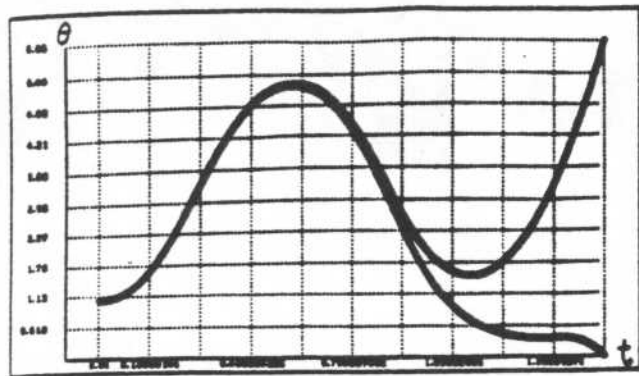


Figure 3: NIS simulation of variable  $\theta$  of the inverted pendulum.

## 2.4 Properties of NIS

We have analyzed some computational properties of NIS, namely completeness and soundness. NIS can be shown to be complete, but not sound.

### 2.4.1 About Completeness

NIS is complete in the sense that its result is guaranteed to bound all the possible solutions of the semi-quantitative model. The proof of completeness follows the steps below:

- Consider the semi-quantitative model  $x'_k = f_k(t, x_1, x_2, \dots, x_n)$ , where  $x_k(t_0) \in I_{0k}$  for  $k = 1, \dots, n$ .
- The function  $f_{max} = \max(f_k(t, x_1, \dots, [x_k], \dots, x_n))$  calculated by NIS is such that :  
 $\forall t, x_k \in R,$   
 $\forall x_1, x_2, \dots, x_n \in I,$   
 $\forall x'_k \in R / x'_k \in f_k(t, x_1, \dots, [x_k], \dots, x_n),$   
 $x'_k \leq f_{max}(t, x_1, \dots, [x_k], \dots, x_n).$

This is straightforward to prove since NIS uses interval arithmetic operations that calculate the set of all possible values for the functions  $f_k$  and only then takes its maximum.

- For  $x_{max}$  such that  $x'_{max} = f_{max}(t, x_1, x_2, \dots, x_n)$ , we can prove that  $\forall t, x_k(t) \leq x_{max}(t).$

The proof is based on the fact that, since the functions  $f_k$  are continuous and  $x_k(t_0) \leq x_{max}(t_0)$ ,  $x_k$  has to be equal to  $x_{max}$  first in order to become greater than  $x_{max}$ . Since at any crossing point the derivative of  $x_{max}$  is greater than the derivative of  $x_k$  (proved in the step above),  $x_k$  will be only smaller or equal to  $x_{max}$  at an arbitrarily small time after the crossing point and  $x_k$  does not become greater than  $x_{max}$ .

- In a similar manner, considering another function  $f_{min}$ , we prove that  $\forall t, x_{min}(t) \leq x_k(t).$

### 2.4.2 About Soundness

Soundness is the property of predicting behaviors that are solution of at least one instance on the semi-quantitative model. Although NIS is not sound in general, the method is very precise in most cases. In this section we first discuss why NIS is usually precise by comparing the method to our first approach for interval simulation [8]. We then discuss and show a particular case in which the method diverges after a couple of interactions.

In order to point out why spurious behaviors are produced, we will recall our first approach for interval simulation [8]. The idea with the former method was to extend a numerical method by substituting its operators by the interval arithmetic correspondents. The extended method is complete but produces too much spurious values. The main reason is that the arithmetic interval operations are applied without taking into account the interaction among variables. Consider the first order system  $x' = -kx$ , there is a strong relation between  $x$  and  $x'$ , and both variables are operands in the extended Euler's method:

$$x(t_{n+1}) = x(t_n) \oplus (h \otimes x'(t_n))$$

$$x(t_{n+1}) = x(t_n) \oplus (h \otimes (\ominus(k \otimes x(t_n))))$$


The possible values for  $x(t_{n+1})$  are only those calculated considering unique values for  $x(t_n)$  in eq.2. The extended method, however, combines all the possible values for  $x(t_n)$  and  $x'(t_n)$ . Imagine  $x_1, x_2$  such that  $x_1, x_2 \in x(t_n)$ , the method considers the combination  $x(t_n) = x_1$ ,

and  $x'(t_n)$  calculated for  $x(t_n) = x_2$ , which would probably produce a spurious value for  $x(t_{n+1})$ . Interactivity is partially overcome by NIS, since the functions  $f_i$  take only the maximum  $x_{imax}(t_n)$  or minimum  $x_{imin}(t_n)$  of state variable  $x_i$ , instead of the full interval  $[x_{imin}(t_n), x_{imax}(t_n)]$ . For example, the NIS Euler's method of the first order system  $x' = -ks$ , with  $k = [k_{min}, k_{max}]$ , is

$$x_{max}(t_{n+1}) = x_{max}(t_n) + h(\max(\Theta(k \otimes [x_{max}])))$$

$$x_{min}(t_{n+1}) = x_{min}(t_n) + h(\min(\Theta(k \otimes [x_{min}])))$$

We can easily prove that the interval  $[x_{min}(t_{n+1}), x_{max}(t_{n+1})]$  produced by NIS is always a sub-interval of  $x(t_{n+1})$  produced by the extended method. Figure 4 illustrates this. The value  $x_{spurious}(t_2)$ , calculated by the extended method, would surely be a spurious value greater than  $x_{max}(t_2)$ , calculated by NIS.

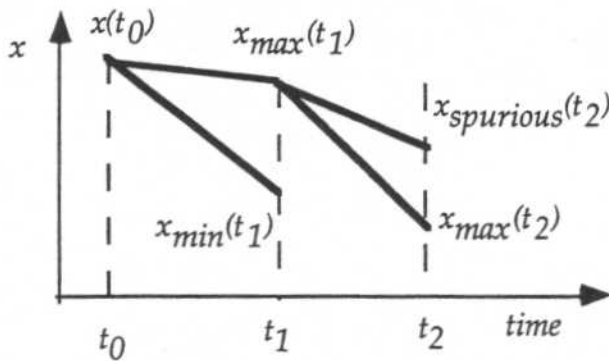

$$x_{max}(t_1) = x(t_0) + h(-k_{min} x(t_0))$$

$$x_{min}(t_1) = x(t_0) + h(-k_{max} x(t_0))$$

$$x_{spurious}(t_2) = x_{max}(t_1) + h(-k_{min} x_{min}(t_1))$$

$$x_{max}(t_2) = x_{max}(t_1) + h(-k_{min} x_{max}(t_1))$$

Figure 4:  $x_{spurious}(t_2)$  and  $x_{max}(t_2)$  calculated by the extended method and NIS respectively

The interval simulation showed in Figure 2 is a very precise simulation. The interval shrinks towards the end of the prediction of an oscillatory behavior, what would rarely be the case with other semi-quantitative methods.

However, other cases of interactivity between the state variable and their derivatives can occur. For example, with systems of the form

$$\begin{aligned} x'_k &= f_k(x_{k+1}), \\ x'_{k+1} &= f_{k+1}(x_{k+2}), \\ &\vdots \\ x'_{k+n} &= f_{k+n}(x_k), \end{aligned}$$

the interactivity is among  $x_i$  and other variables appearing in the equation of  $x'_i$ . NIS simulations of such systems tend to become unstable after several iterations. The inverted pendulum and other oscillatory systems are of this type. Figure 3 illustrates such an instability.

### 3. The Complex Sintering Process

In this section, we present the successful application of NIS to predict behavior of a complex sintering process at CST Companhia Siderurgica de Tubarao, a Brazilian-Japanese steel company located in Brazil. The sintering process continuously produces sinter ore with various kinds of fine iron ore as the raw material and lime stone as the binder. The process has two major goals: One is the stabilization of operation to produce strong sinter ore of uniform size as the ferrous burden of the blast furnace. Another is optimization of the process to minimize the production cost under various conditions and processing throughout the whole iron works. Figure 5 illustrates the sintering plant. The granulated raw material in the surge hopper is fed across the sinter bed width and is ignited by the furnace. The material burns from the surface toward the bottom by the downward air flow through the wind boxes. The material is shifted by the sinter bed towards the cooler.

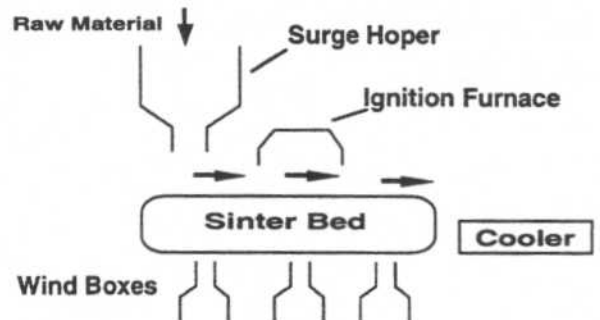


Figure 5: The Sintering Plant

The goal of the process operator is to control the sinter bed speed in order to maximize

productivity while maintaining safety. Too low a speed causes low sinter production and quality; high speed causes burning material to fall into the cooler, damaging the equipment and possibly causing a fire. An observable variable called the *burn through point*,  $Btp$ , is the primary variable to control. The  $Btp$  is supposed to be maintained between 65 and 78%.  $Btp$  below the lower boundary corresponds to low sinter quality condition and lost productivity, while  $Btp$  above the higher boundary corresponds to a dangerous operation condition. The ideal is to keep the  $Btp$  in between 70 and 75%.

A precise model of the sintering process is not available due to the complexity and experimental nature of the process. Indeed, the relations among variables change during the operation, influenced by unknown phenomena. For example, the coefficients significantly change whenever there is a significant change in the quality of the raw material; this is very difficult to monitor. However, it is possible to define boundaries for the relations and parameters. Included in the semi-quantitative model of the sintering process used by NIS is the first order relation (the NIS simulated model actually contains a dozen of these first-order relations),

$$Btp' = P106(t - \tau) - g(Btp),$$

where  $\tau$  is the constant delay between  $Btp$  and pressure  $P106$ , and  $g$  is a piece-wise linear function. Figure 6 shows the given boundaries for  $g(Btp)$ . For more details, see [1].

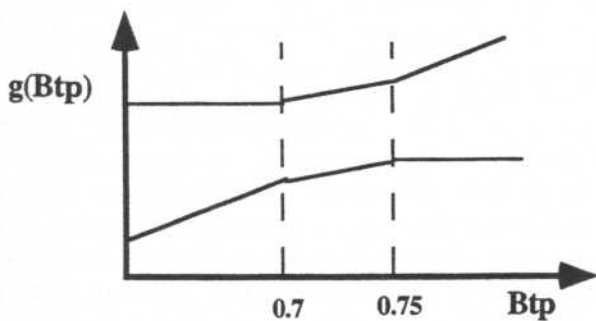


Figure 6: Part of the semi-quantitative model of the sintering process.

Actual productivity, safety and reliability requirements demand optimum operation. In the case of the sintering process,  $Btp$  is to be kept as close as possible to 75%. Small deviations can have significant effects on the process. A

$Btp$  increase of around 3% when its value is at 75% correspond to a very dangerous operation region that can cause fire and damage to the coolers. Predictions that are too wide, either due to lack of knowledge, or weaknesses in the simulation method, are simply useless. Many hours of operation during different periods of the year were simulated, and the results obtained by NIS were very successful. With rare exceptions, the actual behavior of the process was always bounded by NIS simulations (the rare exceptions occurred because of modeling errors as opposed to NIS errors). Furthermore, the predictions were considered tight enough to be useful.

Figure 7 shows an example of a NIS predicted behavior (the two outer thin lines) and the observed behavior (the thick line) of the  $Btp$ . The NIS simulation failed in the interval [380, 430] minutes, indicating that the boundaries were not well chosen in this operating region. This is not of great concern since the system is not supposed to operate in this region ( $Btp$  smaller than 65%). This undesirable behavior occurred in reality because of an operator mistake. Notice that the NIS simulation predicted that the  $Btp$  would penetrate the region below 65% at time 370 minutes. An on-line monitoring system would have thus advised the operator about such possibility, and it could have been avoided.

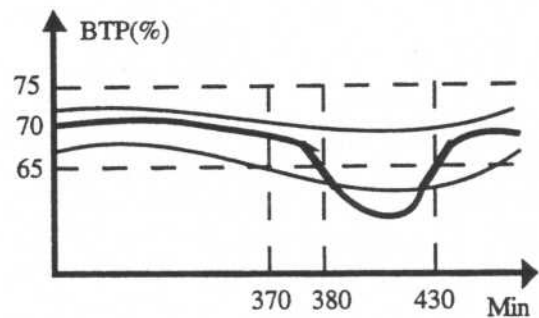


Figure 7: NIS predicted boundaries and the measured value of variable  $Btp$ .

Further work is in progress to run NIS on-line as an adviser for the sintering process operators. The semi-quantitative model is based on the last 6 months of operation. Since the quality of the raw material can significantly influence coefficient values, more work is to be performed in order to increase the reliability of the simulations.



#### 4. Related Work

Research in different areas such as qualitative physics [2, 3, 15, 7], sensitivity analysis [12], tolerance banding [13] and interval analysis [10, 14], address the problem of combining qualitative and quantitative knowledge. We will first discuss the methods outside qualitative physics.

Sensitivity analysis [12] is used to predict the effect of small-scale perturbations to a system. Tolerance banding [13] is used to predict large-scale uncertainties. Both methods are normally restricted to linear models and allow uncertainties of parameters and initial values only. According to Kay and Kuipers [7], bounding methods that do not rely on linearity assumptions have been developed for VLSI simulation [18], but they rely on domain-specific assumptions. Interval Analysis [10, 14] simulates semi-quantitative differential equations by recasting numerical simulators to work with interval arithmetic. Both NIS and the dynamic envelope method numerically simulate extremal systems. An advantage of both approaches is that model imprecision is separated from the error introduced by the simulator. Another advantage is that such methods can switch to more powerful numerical simulators as they are developed.

Inside the scope of qualitative physics, the first semi-quantitative methods such as Q2 [2] and Fu-Sim [3] do not fully exploit the quantitative knowledge available in the semi-quantitative model and produce only weak predictions across time intervals. As model precision increases, NIS produces more precise simulations than Q2 or Fu-Sim. The method replaces the use of the mean value theorem with explicit integration over time.

To establish the temporal correspondence between the observed values and the predictions, the sintering application uses synchronized sampling as most industrial process monitoring systems do. Tracking the process is thus significantly facilitated. The imprecision of the semi-quantitative model only affects variable values estimates. That provides a firmer ground for comparing the results of the simulation with real observations, which is crucial in real time monitoring systems. In semi-quantitative methods like Q2 or Fu-Sim, temporal durations are calculated with the first order Taylor-

Lagrange formulae using quantity space values in the form of numeric or fuzzy intervals. It was shown in [15] that the first order Taylor-Lagrange formulae is scarcely sufficient to provide significant information. This is true, independent of the weakness directly related to a weak quantity space, at the neighborhood of critical points for which the derivative reaches zero. Indeed, zero derivative leads to one infinite boundary for the duration estimate. As a result, time durations calculated for adjacent states are often widely overlapped. It may happen that a given time instant belongs to several consecutive states, implying that variable values at this instant are very weakly constrained.

SIMGEN by Forbus and Falkehainer [16] also uses qualitative and quantitative knowledge. SIMGEN generates a precise model from a library of predefined functions and performs a numerical simulation. The method does not use a semi-quantitative model or simulation.

Most closely related to NIS is the dynamic envelope method [7]. Both methods numerically simulate extremal systems. NIS uses interval arithmetic to calculate the extremal values for derivatives at each simulation step, whereas the dynamic envelope method generates the extremal systems a priori. The dynamic envelope method inherits certain limitations from the QSIM formalism upon which it is built. First, it does not allow forcing functions such as  $A \sin \omega t$  in the example in Section 2.3.2. Forcing functions cannot be reasonably specified in a purely qualitative framework, because the events generated by the forcing function must be exhaustively interleaved with the normal qualitative events. This results in a combinatoric explosion. Second, the QSIM formalism does not allow for non-monotonic function in equations other than multiplication. The dynamic envelope method also benefits from the qualitative representation. QSIM is able to split divergent behaviors, which allows the dynamic envelope method to provide separate, tighter, bounds on each qualitative behavior, rather than a single, broad, bound that covers all of the behaviors.

NIS can simulate systems involving nonmonotonic functions and allows use of forcing functions. NIS is an extension of fuzzy simulation methods for linear systems proposed in [8] and in [4], and for piece-wise linear



systems proposed in [9]. Since a large class of complex industrial processes are modeled by nonmonotonic functions and include force functions, the capability of handling such functions constitutes an important contribution to the field of qualitative physics.

NIS simulations of certain oscillatory systems can be unstable. The same limitation occurs with the dynamic envelope method. An alternative, which consists in intersecting the results of the dynamic envelope method and of Q2, was proposed in [7] in order to improve the results of the simulation in such cases. We are considering the integration of NIS with the methods under development at the University of Texas.

## 5. Summary

The *Numerical Interval Simulation* method produces high precision simulations of semi-quantitative models. The method is complete in the sense that its solutions bound all the solutions of the semi-quantitative model. As the precision of the semi-quantitative model increases, the method produces more precise simulations than former semi-quantitative methods like Q2 or Fu-Sim. Although NIS produces the same results as the dynamic envelope method when simulating systems involving only monotonic functions, the method also simulates systems containing arbitrary continuous, nonmonotonic functions. NIS also allows use of forcing functions. We claim that such level of generality is fundamental to simulate real-world nonlinear complex systems.

We demonstrated the usefulness of NIS by presenting its successful application to simulate a complex sintering process at Companhia Siderurgica de Tubarao, a Brazilian-Japanese steel company located in Brazil. The result shows that NIS is adequate to represent the available information and produces simulations with the required level of precision. The prototype has been tested and we are working to run NIS on-line as an adviser to the sintering process operators.

## References

1. Vescovi, M., *et al.* Qualitative Fuzzy Simulation of Complex Processes : Application to an Iron Ore Sintering Plant. In *Proceedings of*

*the Eighth Conference on Artificial Intelligence in Engineering*. 1993. Toulouse, France.

2. Kuipers, B. and Berleant, D. Using Incomplete Quantitative Knowledge in Qualitative Reasoning. In *Proceedings of the Seventh National Conference on Artificial Intelligence*. 1988.

3. Shen, Q. and Leitch, R. Integrating common-sense and qualitative simulation by the use of fuzzy sets. In *Proceedings of the Fourth International Workshop on Qualitative Physics*. 1990.

4. Vescovi, M. and Trave-Massuyes, L. A Constructive Approach to Qualitative Fuzzy Simulation. In *Proceedings of the Sixth International Workshop on Qualitative Physics*. 1992.

5. Kay, H. and Kuipers, B. Numerical Behavior Envelopes for Qualitative Models. In *Proceedings of the Sixth International Workshop on Qualitative Reasoning about Physical Systems*. 1992. Edinburgh, Scotland.

6. Kuipers, B., Qualitative Simulation. *Artificial Intelligence*, 1986. 29.

7. Kay, H. and Kuipers, B. Numerical Behavior Envelopes for Qualitative Models. In *Proceedings of the Eleventh National Conference on Artificial Intelligence*. 1993.

8. Vescovi, M. *La Représentation des Connaissances et le Raisonnement sur les Systèmes Physiques*. 1991, Ph. D. thesis, Université de Savoie, in French.

9. Vescovi, M., *et al.* Numerical- Based Qualitative Fuzzy Simulation - An Extension for Piece-Wise Linear Systems. In *Proceedings of the Nono Congresso Brasileiro de Automatica*. 1992.

10. Moore, R., *Methods and Applications of Interval Analysis*. 1979, SIAM.

11. Kay, H. *Monitoring and Diagnosis of Multi-Tank Flows using Qualitative Reasoning*. 1991, Master's thesis, University of Texas at Austin,

12. Deif, A., *Sensitivity Analysis in Linear systems*. 1986, Springer-Verlag.

13. Lunze, J., *Robust Multivariable Feedback Control*. 1989, Prentice Hall.
14. Markov, S. and Angelov, R. An interval method for systems of odes. In *Lecture Notes in Computer Science #212 - Interval Mathematics* 1986. Springer-Verlag, Berlin.
15. Missier, A. *Structures Mathematiques pour le Calcul Qualitatif - Contribution a la Simulation Qualitative*. 1991, Ph. D. thesis, I. N. S. A., In French.
16. Forbus, K. and Falkenhainer, B. Self-Explanatory Simulations: An Integration of Qualitative and Quantitative Knowledge. In *Proceedings of the Eighth National Conference on Artificial Intelligence*. 1990.
17. Berleant, D. and Kuipers, B., *Combined Qualitative and Numerical Simulation with Q3*, in *Recent Advances in Qualitative Physics*, B. Faltings and P. Struss, Editor. 1992, MIT Press:
18. Zukowski, Charles A. *The Bounding Approach to VLSI Circuit Simulation* 1986. Kluwer Academic Publishers, Boston.